

LoRaWAN Heavy Duty Thermocouple Temperature Transmitter



Smart Agriculture, Smart Building, Smart City, Smart Energy, Smart Facility, Smart Factory, Smart Farm, Smart Retail, Smart Utilities

SKU: WSLRWAL-TC

HEAVY-DUTY LoRaWAN THERMOCOUPLE TRANSMITTER WSLRWAL-TC



WSLRWAL-TC-H1.JPG



WSLRWAL-TC is LoRaWAN wireless transmitter for heavy duty applications, with modular design connected to thermocouple temperature sensor, based on 10-year experience in design and manufacturing Industrial sensor of Daviteq Company. It has been factory pre-calibrated for high accuracy and quick set-up. The Ultra-Low Power design and smart firmware allow the sensor to last up to 10 years with 01 x C 3.6V battery (depending on configuration). The sensor will transmit data over kilometers away to the LoRaWAN gateway, any brand on the market. Some typical applications are temperature monitoring for factories, agriculture, boilers,...

Applications


Temperature Monitoring, Process Monitoring, Safety Monitoring

Notes For Applications

When selecting a thermocouple transmitter node, consider the following criteria:

- **Temperature Range:** Determine the required measurement temperature range for your application.
- **Chemical Resistance:** Assess the compatibility and durability of the thermocouple wires with the environment where they will be exposed.
- **Abrasion and Vibration Resistance:** Choose a transmitter that can withstand abrasion and vibration in your specific installation.
- **Installation Requirements:** Consider existing equipment and available probe hole sizes to determine the appropriate probe diameter.

- ✓ **LoRaWAN communication**
LoRaWAN communication standard to allow sensor connect to any LoRaWAN Gateway on the market
- ✓ **10-Year battery**
Ultra-low power sensing technology from Daviteq with Ultra-low power wireless technology allow the sensor can last up to 10 years with 1 x C batteries 3.6VDC
- ✓ **Pre-calibrated**
Sensors are pre-calibrated at factory to deliver high accuracy and quick installation
- ✓ **Heavy-duty design**
Cast aluminum, IP66 housing for heavy-duty applications.

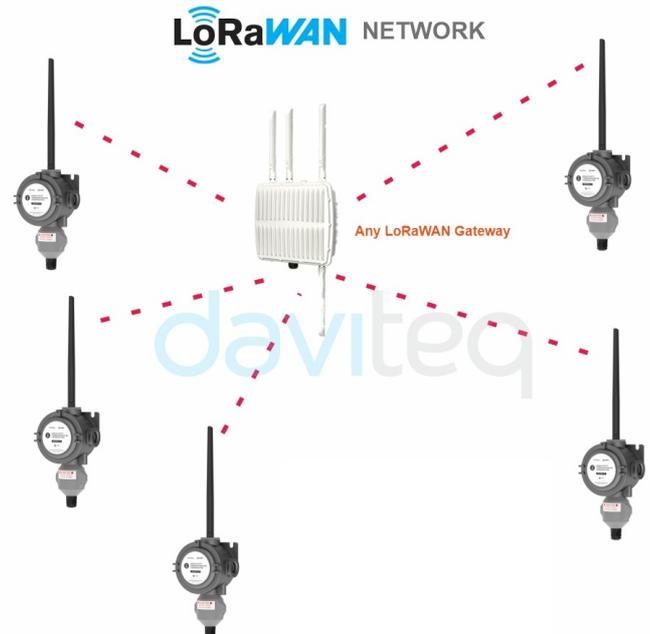

WSLRWAL-TC-H5.JPG

DAVITEQ TECHNOLOGIES INC

Ho Chi Minh City, VN | Koblenz, DE | Melbourne, AU | Zurich, CH

+84.28.6268.2523 / 6268.2524

info@daviteq.com

www.iot.daviteq.com

Created date: Jun-02-2024

Updated date: Nov-08-2025

Specification

Input	Thermocouple Temperature Sensor Type B, Type E, Type J, Type K, Type N, Type R, Type S, Type T
Accuracy	±0.55°C in ambient temperature range -20~100°C ±1.05°C in ambient temperature range -40~125°C **Not included error of Thermocouples
Resolution	0.1°C
Sensor port connector	Internal Connectors via PG9 Cable Gland
COMMUNICATION	
SF Factors	SF7~SF12
Antenna	External antenna
Power Supply	Primary batteries 01 x C size 3.6VDC (battery not included)
RF Frequency and Power	860~930MHz, 14~20 dBm, configurable for zones: EU868, IN865, RU864, KR920, AS923, AU915, US915
Protocol	LoRaWAN Class A V1.0.3
Data sending modes	interval time, alarm and manually triggering by magnetic key
Housing	Cast aluminum, IP66
Ambient working temperature	-40~85°C (use with SAFT LS26500)
Size Net weight	H190xW100xD75/700g (excluding antenna)
Mounting type	Wall mount

DAVITEQ TECHNOLOGIES INC

 Ho Chi Minh City, VN | Koblenz, DE | Melbourne, AU | Zurich, CH

 +84.28.6268.2523 / 6268.2524

 info@daviteq.com

www.iot.daviteq.com

Created date: Jun-02-2024

Updated date: Nov-08-2025

TEMPERATURE MEASUREMENT HELP PREVENT OVERHEATING IN OIL REFINERIES



WSLRWAL-TC-H2.JPG

CONNECT WITH THERMOCOUPLE TEMPERATURE SENSOR




WSLRWAL-TC-H3.JPG

LoRaWAN SENSOR CONNECT WITH THERMOCOUPLE SENSOR VIA PG9 CONNECTOR



WSLRWAL-TC-H4.JPG

DIMENSION DRAWING OF WIRELESS NODE (Unit: mm)

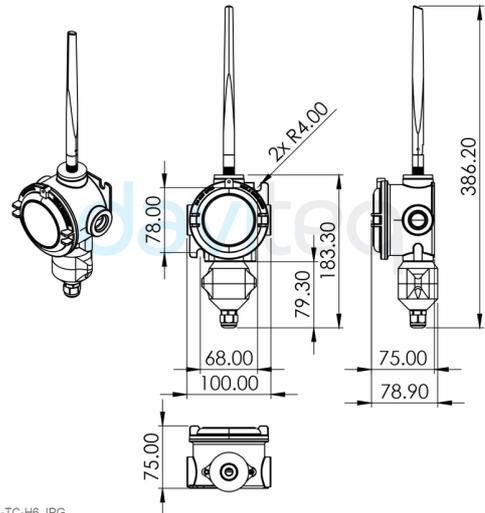

WSLRWAL-TC-H6.JPG

RECOMMENDED BATTERIES FOR LoRaWAN NODE

LS 26500 Lithium battery



-60°C..+85°C working temperature
Low self-discharge rate
7.7 Ah Capacity

WSLRWAL-TC-H7.JPG

WHAT'S IN THE PACKAGE?



Main Device Antenna Accessories

DAVITEQ TECHNOLOGIES INC

📍 Ho Chi Minh City, VN | Koblenz, DE | Melbourne, AU | Zurich, CH
 ☎️ +84.28.6268.2523 / 6268.2524
 ✉️ info@daviteq.com www.iot.daviteq.com

Created date: Jun-02-2024

Updated date: Nov-08-2025

Ordering Information

ITEM CODE	DESCRIPTIONS
WSLRWAL-TC-01	Wireless LoRaWAN Heavy-duty Thermocouple Temperature Transmitter, External antenna, Type C battery 3.6VDC, IP66, 860-930MHz for all regions

DAVITEQ TECHNOLOGIES INC

 Ho Chi Minh City, VN | Koblenz, DE | Melbourne, AU | Zurich, CH

 +84.28.6268.2523 / 6268.2524

 info@daviteq.com

www.iot.daviteq.com

Created date: Jun-02-2024

Updated date: Nov-08-2025